

**DAB Dränkbar pump  
teknopolymer 1 1/4" invändig  
gänga 4,2A 230VAC svart/grå  
type DTRON3 45/90 (7043936)**



# TEKNISKA SPECIFIKATIONER

|                                           |                |
|-------------------------------------------|----------------|
| Färg                                      | svart/grå      |
| Material                                  | teknopolymer   |
| Pump body                                 | teknopolymer   |
| Material impeller 1                       | teknopolymer   |
| Anslutning                                | invändig gänga |
| Volt                                      | 230VAC         |
| Max temperatur                            | 50 °C          |
| Minste mellantemperatur<br>(kontinuerlig) | 0 °C           |
| Tryck                                     | 1 1/4 "        |
| Max omgivelsetemperatur                   | 50 °C          |
| Minimum ambient temperature               | 0 °C           |
| Typ                                       | DTRON3 45/90   |
| Uteffekt                                  | 0,8 Hk         |
| MWC                                       | 45 m           |
| Storlek                                   | 1 1/4"         |
| Effekt                                    | 0.6 kW         |

|        |       |
|--------|-------|
| Ampere | 4,2 A |
|--------|-------|

|               |                       |
|---------------|-----------------------|
| Max flow rate | 6.3 m <sup>3</sup> /h |
|---------------|-----------------------|

|              |      |
|--------------|------|
| BEP Capacity | 4.21 |
|--------------|------|

|          |      |
|----------|------|
| BEP Head | 19.4 |
|----------|------|

|       |     |
|-------|-----|
| PORlh | 0.6 |
|-------|-----|

|       |    |
|-------|----|
| PORhh | 45 |
|-------|----|

|       |     |
|-------|-----|
| PORlq | 0.7 |
|-------|-----|

|       |     |
|-------|-----|
| PORhq | 6.3 |
|-------|-----|



## DIMENSIONER

|    |        |
|----|--------|
| Db | 185 mm |
|----|--------|

|     |        |
|-----|--------|
| H-2 | 611 mm |
|-----|--------|

|       |         |
|-------|---------|
| ØDi-1 | 1 1/4 " |
|-------|---------|



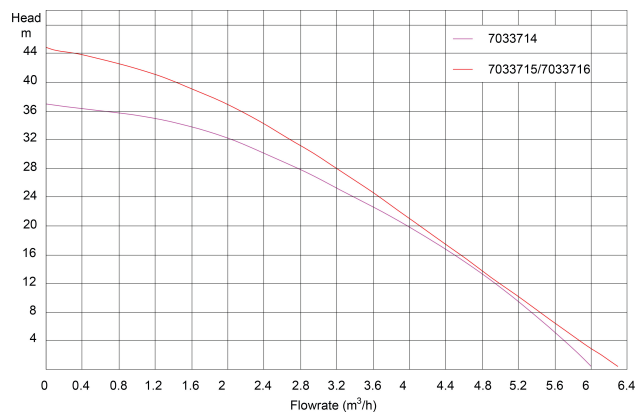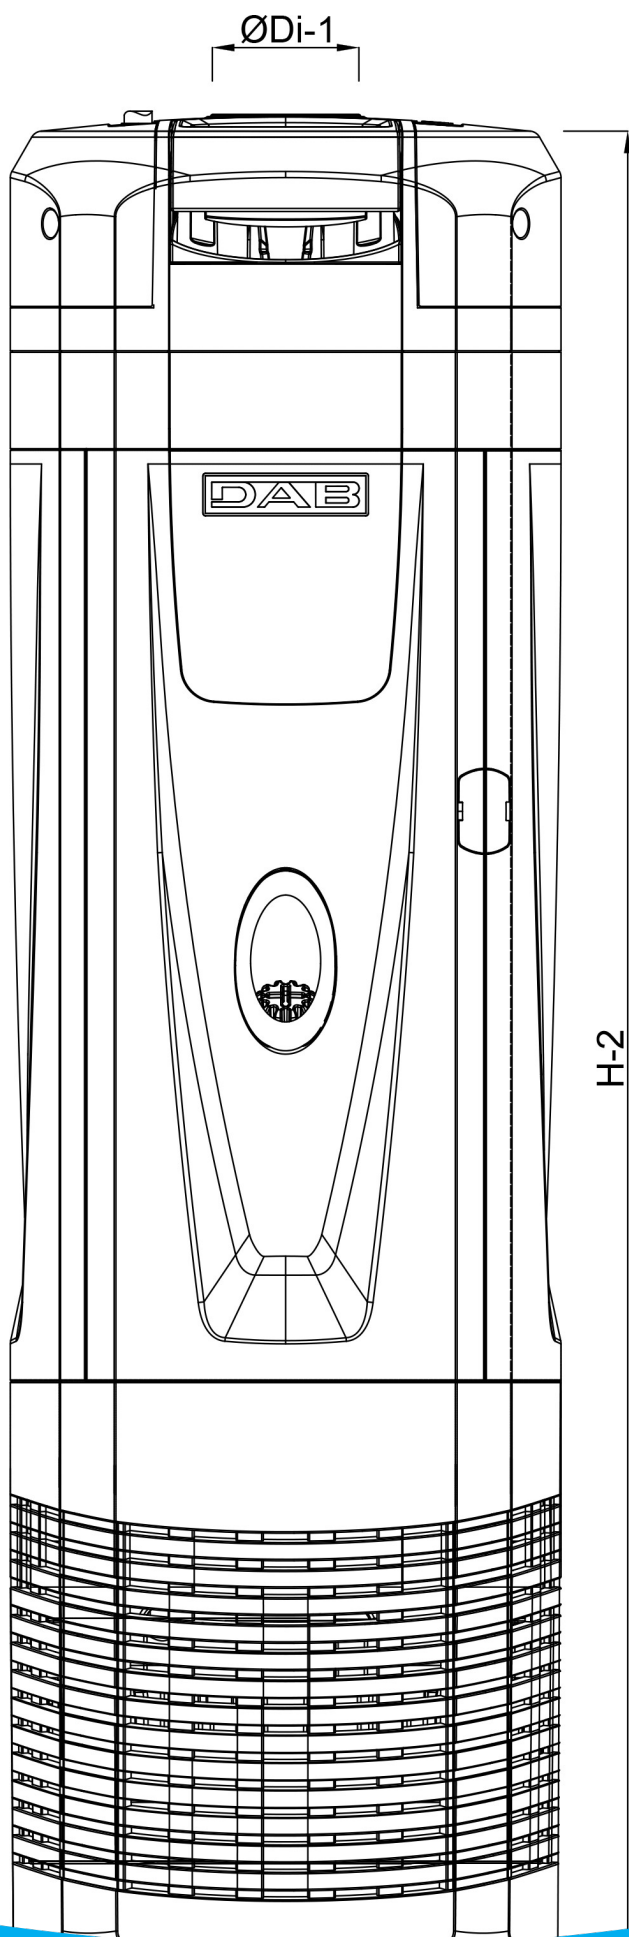

# PRODUKTINFORMATION

Installation: Fixed, horizontal or vertical. Submerged or semi-submerged. Maximum immersion depth: 7/12 m Pump can be used with liquids containing solid particles of up to 2 mm in size. Suitable for use in residential building services for pressurisation, rainwater reuse, gardening and irrigation. Integrated debris filter and check valve. Electronic operation allows the pump to start and stop autonomously in line with system requirements and protects against a dry run.

**Genererad den: 05/09/2026**

Bevo Nordic A/S  
Pakhusgården 54  
5000 Odense C  
Danmark  
+45 66 19 25 45  
[info@bevo.dk](mailto:info@bevo.dk)  
<http://www.bevo.com>