

**DAB Dränkbar pump
teknopolymer 1 1/4" invändig
gänga 4,2A 230VAC svart/grå
type DTRON 2 X 45/90 Med 1
meter sugledning (7033716)**



TEKNISKA SPECIFIKATIONER

Färg	svart/grå
Material	teknopolymer
Pump body	teknopolymer
Material impeller 1	teknopolymer
Anslutning	invändig gänga
Volt	230VAC
Max temperatur	50 °C
Minste mellantemperatur (kontinuerlig)	0 °C
Tryck	1 1/4 "
Max omgivelsetemperatur	50 °C
Minimum ambient temperature	0 °C
Typ	DTRON 2 X 45/90
Uteffekt	0,8 Hk
MWC	45 m
Storlek	1 1/4"
Typ	Med 1 meter sugledning

Effekt	0.6 kW
--------	--------

Ampere	4,2 A
--------	-------

Max flow rate	6.3 m ³ /h
---------------	-----------------------

Sug	1" "
-----	------

BEP Capacity	4.21
--------------	------

BEP Head	19.4
----------	------

PORlh	0.6
-------	-----

PORhh	45
-------	----

PORlq	0.7
-------	-----



PORhq	6.3
-------	-----

DIMENSIONER

Db	185 mm
----	--------

H-2	611 mm
-----	--------

ØDi-1	1 1/4 "
-------	---------

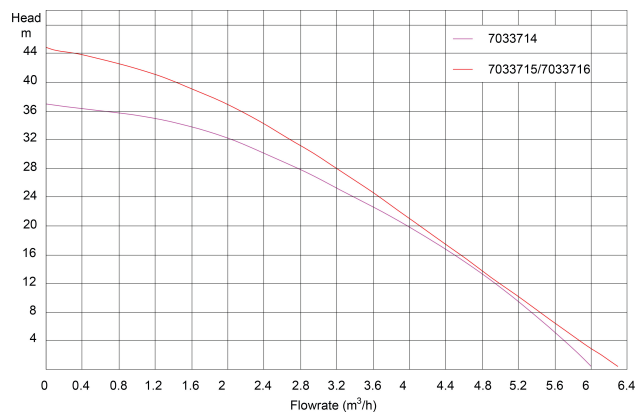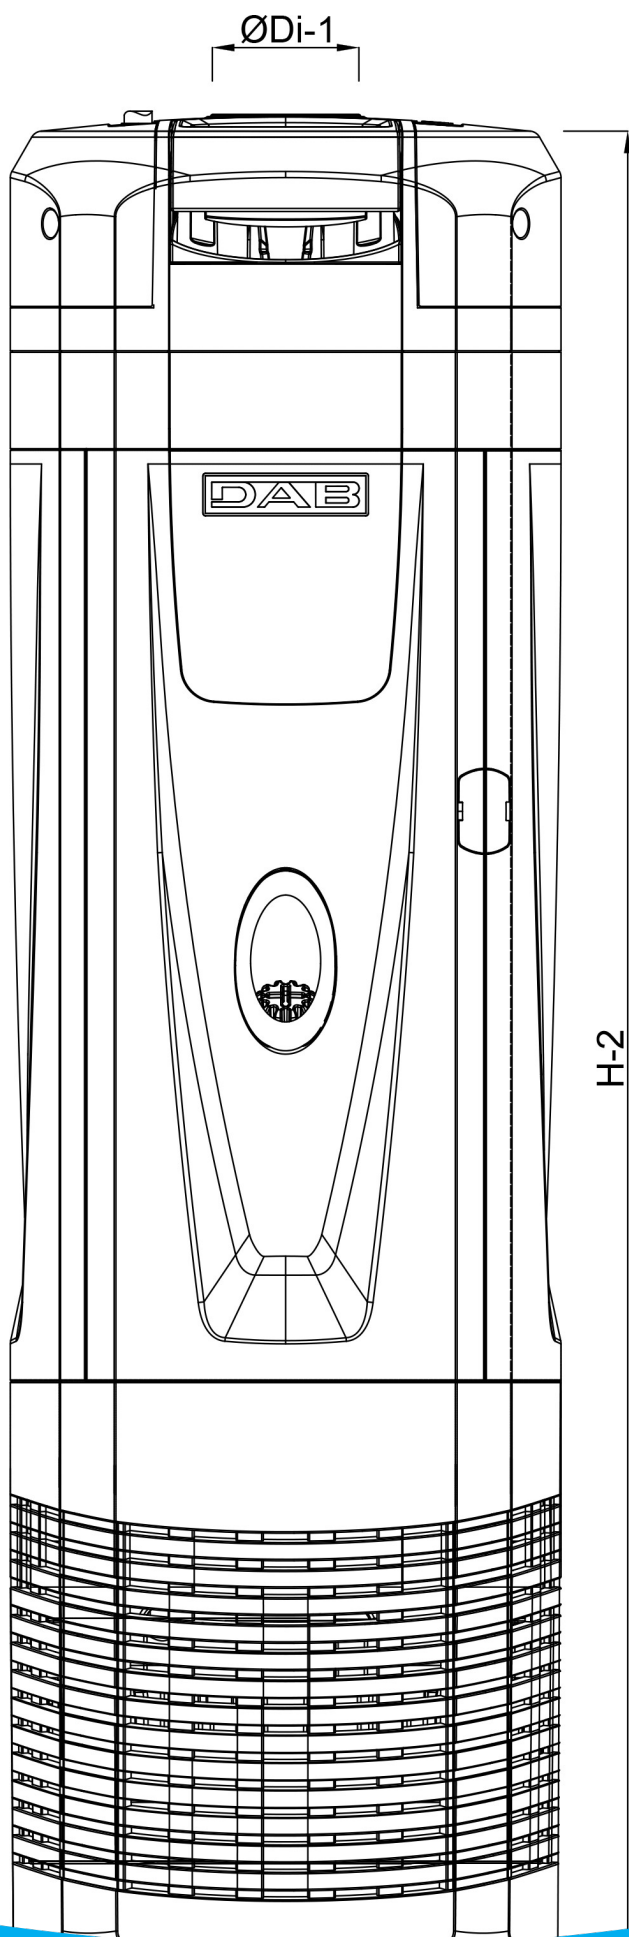

PRODUKTINFORMATION

Installation: Fixed, horizontal or vertical. Submerged or semi-submerged. Maximum immersion depth: 7/12 m Pump can be used with liquids containing solid particles of up to 2 mm in size. Suitable for use in residential building services for pressurisation, rainwater reuse, gardening and irrigation. Integrated debris filter and check valve. Electronic operation allows the pump to start and stop autonomously in line with system requirements and protects against a dry run.

Genererad den: 05/09/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C
Danmark
+45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>