

DAB jet-pump rostfritt stål 304 1" invändig gänga 8bar 6,2A 230VAC grön självsugande med tryckkontroll type JETINOX 112 Control D (7030931)



TEKNISKA SPECIFIKATIONER

Färg grön

Material rostfritt stål 304

Pump body rostfritt stål 304

Material impeller 1 teknopolymer A

Modell självsugande med tryckkontroll

Anslutning invändig gänga

Volt 230VAC

Max temperatur 35 °C

Minste mellantemperatur
(kontinuerlig) 0 °C

Tryck 1 "

Max omgivningstemperatur 40 °C

Sug 1 "

Typ JETINOX 112 Control D

Storlek 1"

Effekt 0.75 kW

MWC 53,8

Ampere	6,2 A
--------	-------

Max flow rate	3.6 m ³ /h
---------------	-----------------------

BEP Capacity	2.4
--------------	-----

BEP Head	39.2
----------	------

PORlh	45.1
-------	------

PORhh	35.1
-------	------

PORlq	1.7
-------	-----

PORhq	2.9
-------	-----

DIMENSIONER

L	424 mm
---	--------

H	197 mm
---	--------

LM	409 mm
----	--------

Cb-1	102.5 mm
------	----------

Ct-1	102.5 mm
------	----------




Cr-1	89 mm
------	-------

L	440 mm
---	--------

W-1	174 mm
-----	--------

ØDi-1	1 "
-------	-----

ØDi-2	1 "
O	9 mm
Cb-1	144 mm
G	111 mm
Cl-1	122 mm
Mr	207 mm
H	197 mm

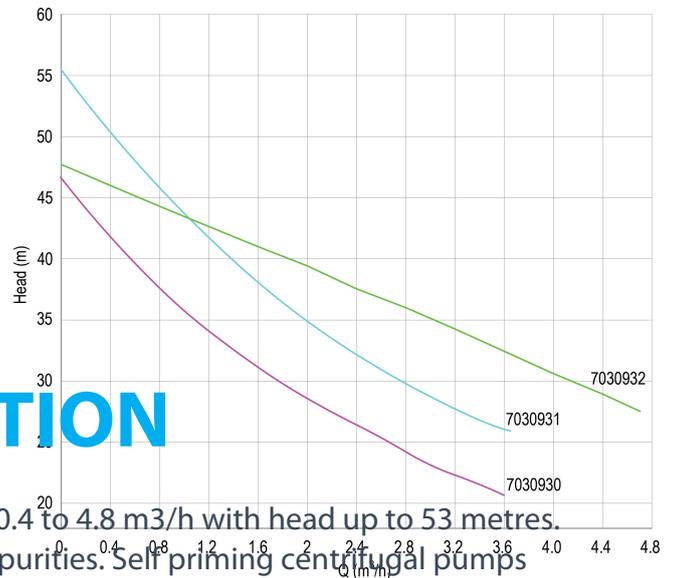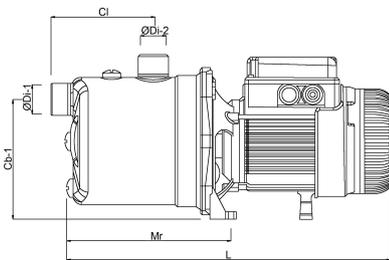

PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Genererad den: 08/11/2025

Bevo Nordic A/S
 Pakhusgården 54
 5000 Odense C
 Danmark
 +45 66 19 25 45

info@bevo.dk
<http://www.bevo.com>

